
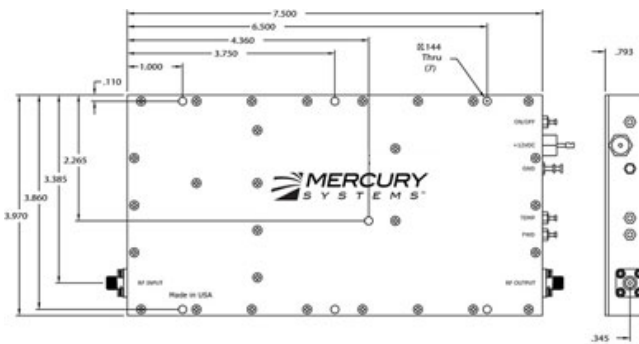


# SM09296-47L

## 925 MHz to 960 MHz

### POWER AMPLIFIERS

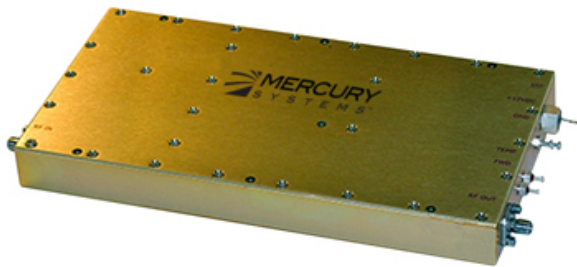

### Specifications

	Min	Typ	Max	Unit
RF Frequency	925		960	MHz
P1dB Power Output		47		dBm
Linear Gain		58 ±1		dB
Gain Flatness Over Band		±1		dB
Gain Change Over Temp		±1		dB
Third Order Intercept (OIP3)		66		dBm
Input Return Loss			-14	dB
Output Return Loss			-14	dB

### Operating Characteristics

	Min	Typ	Max	Unit
Supply Voltage		12		VDC
Operating Current Draw		17		A

### Pin Table

Pin	Value	Description
RF Input	- 11 dBm, typical	Input Connector (SMA Female)
RF OUTPUT	+ 47 dBm (P1 dB)	Output Connector (SMA Female)
GND	---	Ground Turret
FWD	+ 43 dBm Output Power ? + 4.5 Volts	Forward Power Detector
+12VDC	+ 12 Volts @ 17 Amperes	DC Input Voltage
I/O	0 Volts = Off, +5 Volts = On	TTL Logic On/Off

### Notes

### Featured and Options

- Options:  
 TTL on/off  
 Heatsink
- Features:  
 Over Voltage Protection  
 Reverse Voltage Protection  
 Thermal Monitor  
 Forward Power Detection

### Environmental Ratings

	Min	Typ	Max	Unit
Operating Temperature	0		55	°C
Operating Humidity		95%		
Operating Altitude		10000		Ft

### Connectivity

RF Input Connector	SMA F
RF Output Connector	SMA F



Microwave RF Components | Hudson, NH | (603) 546-4100 | [rf.mrcy.com](http://rf.mrcy.com)  
Specifications subject to change without notice

[Request a Quote](#) | [Ask an Engineer](#)  

