


SM1920-47L

1900 MHz to 2000 MHz

POWER AMPLIFIERS

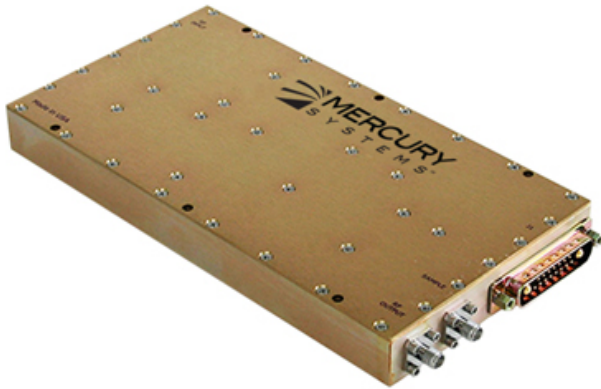

Specifications

	Min	Typ	Max	Unit
RF Frequency	1900		2000	MHz
P1dB Power Output		47		dBm
Linear Gain		55 ±1		dB
Gain Flatness Over Band		±1		dB
Gain Change Over Temp		±1		dB
Third Order Intercept (OIP3)		66		dBm
Input Return Loss			-16	dB
Output Return Loss			-16	dB

Operating Characteristics

	Min	Typ	Max	Unit
Supply Voltage		12		VDC
Operating Current Draw		15		A

Featured and Options

Options:

- TTL on/off
- Heatsink

Features:

- Over Voltage Protection
- Thermal Monitor
- Forward Power Detection

Pin Table

Pin	Value	Description
RF Input	-7 dBm max	Input Connector (SMA Female)
RF Output	+ 47 dBm @ P1dB	Output Connector (SMA Female)

Environmental Ratings

	Min	Typ	Max	Unit
Operating Temperature	0		55	°C
Operating Humidity		95%		
Operating Altitude		10000		Ft

Notes

Connectivity

RF Input Connector	SMA F
RF Output Connector	SMA F

