
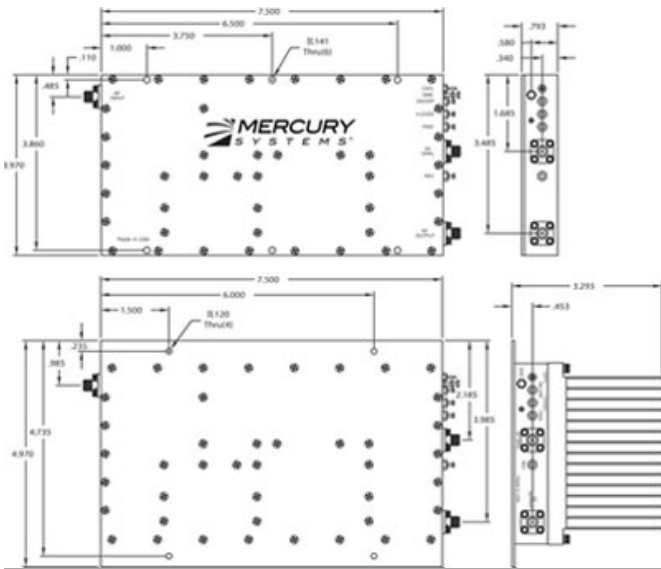


SPEC SHEET

SM6471-43L

6400 MHz to 7100 MHz

POWER AMPLIFIERS

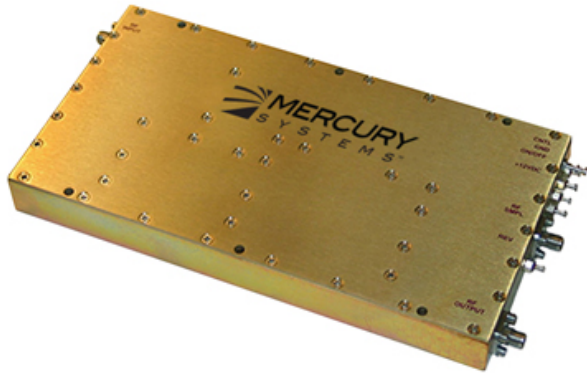

Specifications

	Min	Typ	Max	Unit
RF Frequency	6400		7100	MHz
Linear Power Output		37		dBm
P1dB Power Output	43	43.5		dBm
Linear Gain		55 ±1		dB
Gain Flatness Over Band		±1.5		dB
Gain Change Over Temp		±1		dB
Third Order Intercept (OIP3)		55		
Input Return Loss			-16	dB

Operating Characteristics

	Min	Typ	Max	Unit
Supply Voltage	11	12	13	VDC
Operating Current Draw		9	11	A

Pin Table

Pin	Value	Description
-----	-------	-------------

Notes

Featured and Options

- Options:
 TTL on/off
 Fan
 Heatsink
 Features:
 Forward Power Detection

Environmental Ratings

	Min	Typ	Max	Unit
Storage Temperature	-40		85	°C
Operating Temperature	-20		85	°C
Automatic Shut Off Temp		90		°C
Operating Humidity		95%		
Operating Altitude		30000		Ft

Connectivity

RF Input Connector	SMA F
RF Output Connector	SMA F
Control/Monitoring Connector	Feedthrough Pins



Microwave RF Components | Hudson, NH | (603) 546-4100 | rf.mrcy.com
Specifications subject to change without notice

[Request a Quote](#) | [Ask an Engineer](#)  

