


# SMF635-F1105

## 11.7 GHz to 12.3 GHz

Communications PAC ISOLATORS & CIRCULATORS

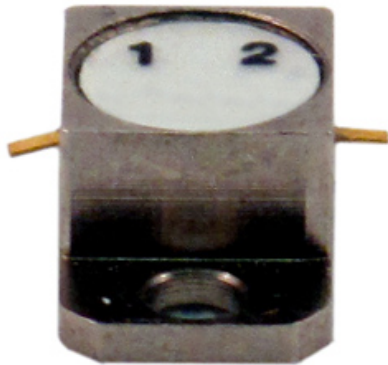

### Specifications

|                |                      |
|----------------|----------------------|
| RF Frequency   | 11.7 GHz to 12.3 GHz |
| Isolation      | 20 dB (min)          |
| Insertion Loss | 0.4 dB (max)         |
| VSWR           | 1.25:1               |
| Peak Power     | 10 Watts (max)       |
| Average Power  | 1 Watts (max)        |
| Power Forward  | 5 Watts              |
| Power Reverse  | 0.5 Watts            |
| Package Size   | 0.26 x 0.50 x 0.18"  |

### Environmental

|                       |              |
|-----------------------|--------------|
| Operating Temperature | -30 to 80 °C |
|-----------------------|--------------|

### Notes

