


SPEC SHEET

SMF635-F1702

17.7 GHz to 19.7 GHz

Communications PAC ISOLATORS & CIRCULATORS

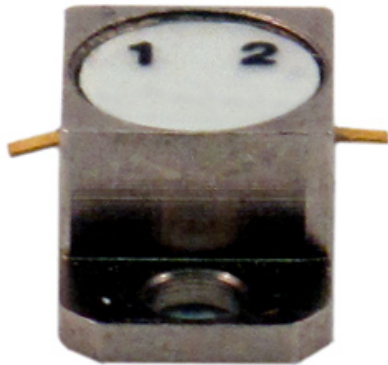

Specifications

RF Frequency	17.7 GHz to 19.7 GHz
Isolation	20 dB (min)
Insertion Loss	0.5 dB (max)
VSWR	1.25:1
Peak Power	5 Watts (max)
Average Power	0.5 Watts (max)
Power Forward	5 Watts
Power Reverse	0.5 Watts
Package Size	0.26 x 0.50 x 0.18"

Environmental

Operating Temperature	-40 to 85 °C
-----------------------	--------------

Notes

