

# SMF950-F0400

## 4.2 GHz to 4.4 GHz

Communications PAC ISOLATORS & CIRCULATORS




### Specifications

|                |                      |
|----------------|----------------------|
| RF Frequency   | 4.2 GHz to 4.4 GHz   |
| Isolation      | 20 dB (min)          |
| Insertion Loss | 0.5 dB (max)         |
| VSWR           | 1.25:1               |
| Peak Power     | 50 Watts (max)       |
| Average Power  | 5 Watts (max)        |
| Power Forward  | 5 Watts              |
| Power Reverse  | 0.5 Watts            |
| Package Size   | 0.375 x 0.62 x 0.21" |

### Environmental

|                       |              |
|-----------------------|--------------|
| Operating Temperature | -40 to 85 °C |
|-----------------------|--------------|

### Notes

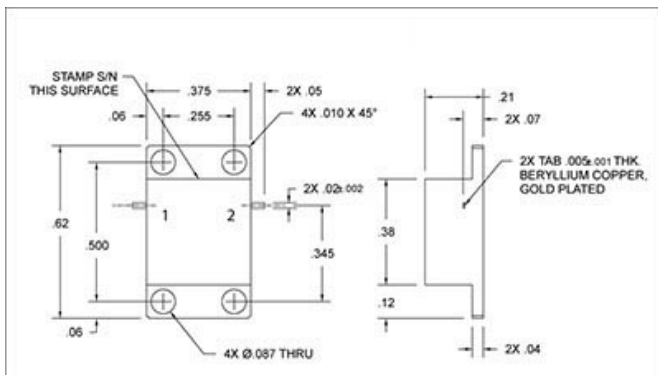

STAMP S/N  
THIS SURFACE

