

SPEC SHEET

SMF950-F0520

5.8 GHz to 6.5 GHz

Communications PAC ISOLATORS & CIRCULATORS




Specifications

RF Frequency	5.8 GHz to 6.5 GHz
Isolation	20 dB (min)
Insertion Loss	0.4 dB (max)
VSWR	1.25:1
Peak Power	50 Watts (max)
Average Power	5 Watts (max)
Power Forward	5 Watts
Power Reverse	0.5 Watts
Package Size	0.375 x 0.62 x 0.21"

Environmental

Operating Temperature	-40 to 85 °C
-----------------------	--------------

Notes

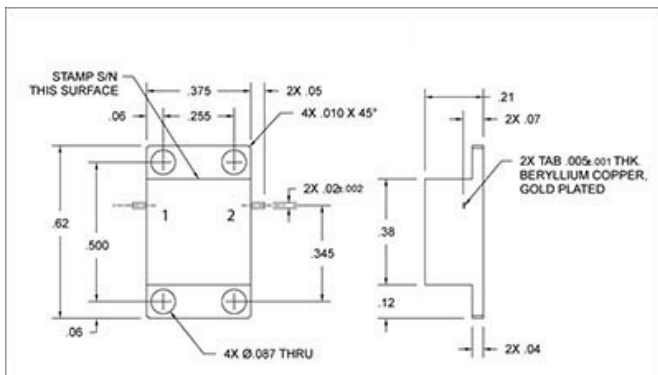

STAMP S/N
THIS SURFACE

