

# SMF950-F0600

## 6.4 GHz to 7.1 GHz

Communications PAC ISOLATORS & CIRCULATORS




### Specifications

RF Frequency	6.4 GHz to 7.1 GHz
Isolation	20 dB (min)
Insertion Loss	0.5 dB (max)
VSWR	1.25:1
Peak Power	50 Watts (max)
Average Power	5 Watts (max)
Power Forward	5 Watts
Power Reverse	0.5 Watts
Package Size	0.375 x 0.62 x 0.21"

### Environmental

Operating Temperature	-40 to 85 °C
-----------------------	--------------

### Notes

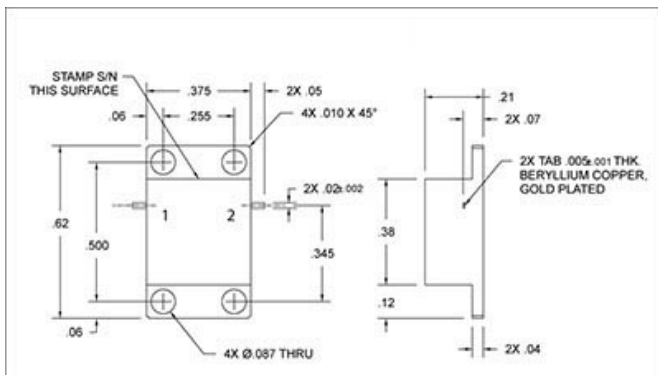

STAMP S/N  
THIS SURFACE

