


SPEC SHEET

T-216K01

16 GHz to 22 GHz

High Frequency Coaxial ISOLATORS & CIRCULATORS

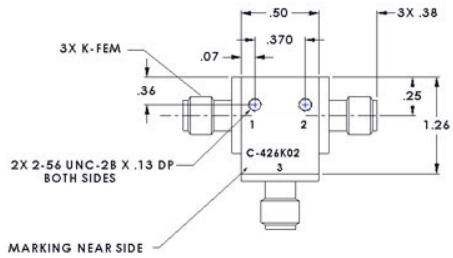

Specifications

RF Frequency	16 GHz to 22 GHz
Isolation	20 dB (min)
Insertion Loss	0.5 dB (max)
VSWR	1.3:1
Peak Power	2 Watts (max)
Average Power	0.5 Watts (max)
Package Size	0.50 X 0.63 X 0.50"

Environmental Notes



Microwave RF Components | Manteca, CAL | 1-209-825-3977 | rf.mrcy.com
 Specifications subject to change without notice

