
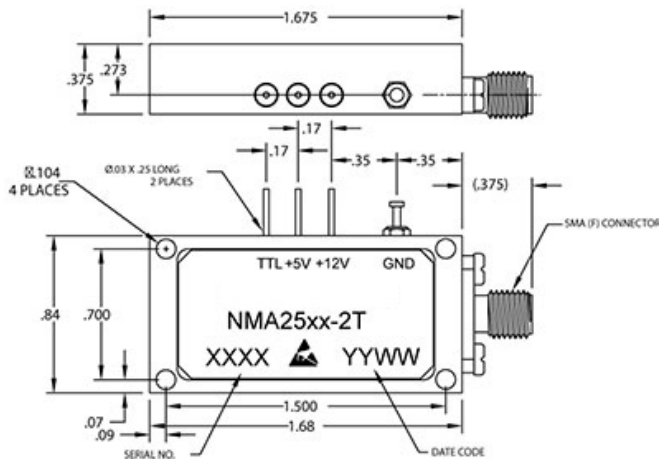


NMA2511-2T

10 MHz to 1500 MHz

High Power Broadband Noise Sources

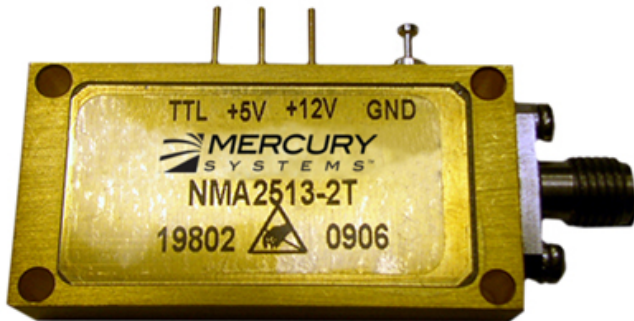

Specifications

| | |
|----------------------------------|---|
| RF Frequency | 10 MHz to 1500 MHz |
| Noise Output | 82.2 dB Min ENR |
| Noise Spectral Density (N_0) | -91.8 dBm/Hz Min |
| Noise Power (N) | 0 dBm |
| Flatness | 2 dB P-P Max |
| Peak Factor | 5:01 |
| Bias Voltage | 5 and 12 V |
| Supply Current | 5.0 +/- .1 v @ 300 mA Max 11.8 - 18v @ 25 mA Max |
| Impedance | 50 ohms |

Package and Connectivity

| | |
|----------------|-----------|
| Construction | Coaxial |
| Package Type | T Package |
| Connector Type | SMA(F) |

Environmental

| | |
|-----------------------|--------------|
| Operating Temperature | -30 to 85 °C |
| Storage Temperature | -65 to 95 °C |

Notes

TTL Control



