


SPEC SHEET

# NST10H

## 2 GHz to 10 GHz

Broadband Microwave Coaxial Noise Sources

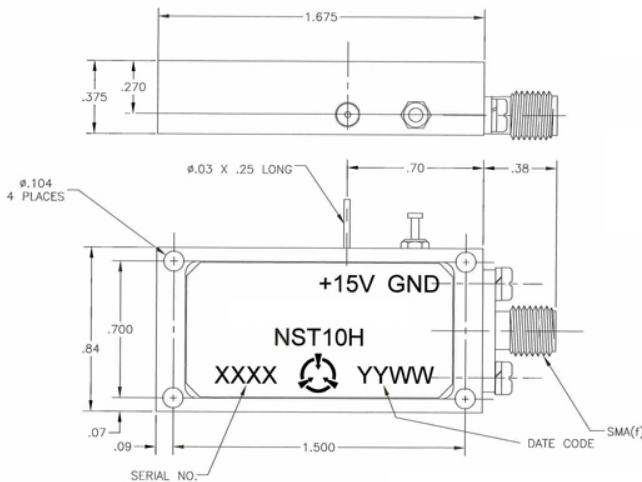

### Specifications

RF Frequency	2 GHz to 10 GHz
Noise Output	55 dB Min ENR
Noise Spectral Density ( $N_0$ )	-119 dBm/Hz
Flatness	3 dB P-P Max
Peak Factor	5:01
Bias Voltage	15 V
Supply Current	200 mA Max
Impedance	50 ohms

### Package and Connectivity

Construction	Coaxial
Connector Type	SMA(F)

### Environmental

Operating Temperature	-30 to 85 °C
Storage Temperature	-65 to 125 °C

### Notes



Microwave RF Components | Hudson, NH | (603) 546-4100 | [rf.mrcy.com](http://rf.mrcy.com)  
 Specifications subject to change without notice

