
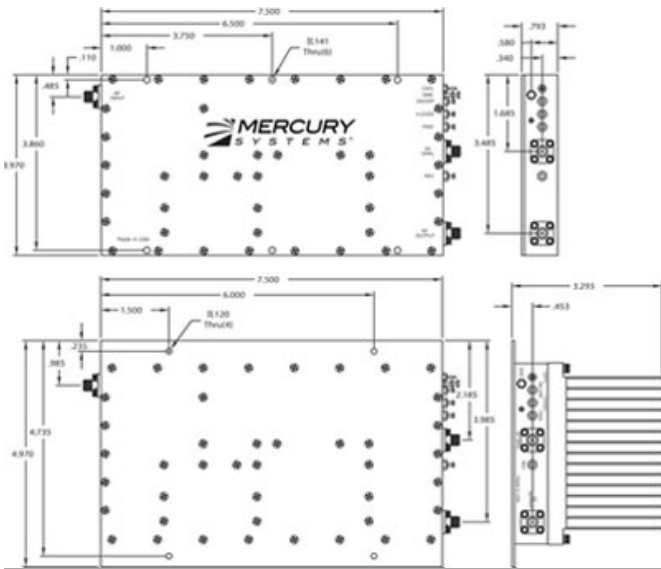


SPEC SHEET

# SM2327-44L

## 2300 MHz to 2700 MHz

### POWER AMPLIFIERS

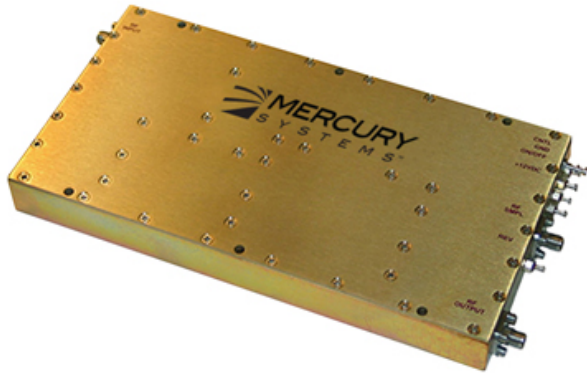

### Featured and Options

- Options:  
 TTL on/off  
 Heatsink  
 Features:  
 Over Voltage Protection  
 Thermal Monitor  
 Forward Power Detection

### Environmental Ratings

	Min	Typ	Max	Unit
Operating Temperature	0		55	°C
Operating Humidity		95%		
Operating Altitude		10000		Ft

### Connectivity

RF Input Connector SMA F

### Specifications

	Min	Typ	Max	Unit
RF Frequency	2300		2700	MHz
P1dB Power Output	43.5	44		dBm
Linear Gain		55 ±1		dB
Gain Flatness Over Band		±1		dB
Gain Change Over Temp		±1		dB
Third Order Intercept (OIP3)		63		dBm

### Operating Characteristics

	Min	Typ	Max	Unit
Supply Voltage		12		VDC
Operating Current Draw		8.5		A

### Pin Table

Pin	Value	Description
RF Input	- 9 dBm, typical	Input Connector (SMA Female)
RF OUTPUT	+ 44 dBm @ P1dB	Output Connector (SMA Female)
RF SAMPLE	30 dBr	Sample RF Port ( SMA Female )
GND	---	Ground Turret
FWD	+ 33 dBm Output Power ? + 2.0 Volts	Forward Power Detector
REV	? VSWR @ + 37 dBm ? + 2.0 Volts	Reverse Power Detector
+12VDC	+ 12 Volts @ 8.5 Amperes (typ.)	DC Input Voltage
On/Off	0 Volts = Off, +5 Volts = On	TTL Logic On/Off
CNTL	Switching Speed up to 100 kHz	TTL Pulse Control

### Notes



Microwave RF Components | Hudson, NH | (603) 546-4100 | [rf.mrcy.com](http://rf.mrcy.com)  
Specifications subject to change without notice

[Request a Quote](#) | [Ask an Engineer](#)  

