
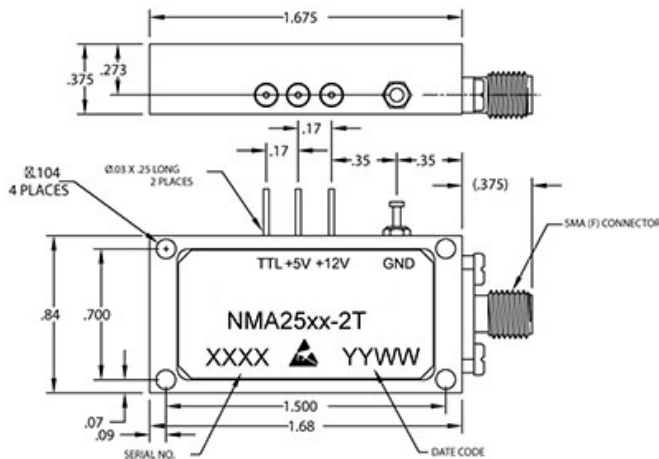


SPEC SHEET

# NMA2514-2T

## 100 MHz to 6000 MHz

High Power Broadband Noise Sources

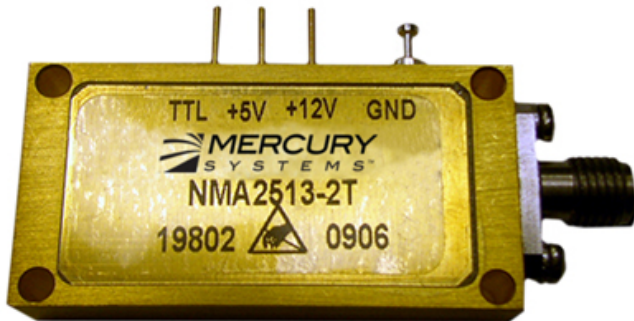

### Specifications

RF Frequency	100 MHz to 6000 MHz
Noise Output	74 dB Min ENR
Noise Spectral Density ( $N_0$ )	-100 dBm/Hz Min
Noise Power (N)	-3 dBm
Flatness	4 dB P-P Max
Peak Factor	5:01
Bias Voltage	5 and 12 V
Supply Current	5.0 +/- .1 v @ 300 mA Max 11.8 - 18v @ 25 mA Max
Impedance	50 ohms

### Package and Connectivity

Construction	Coaxial
Package Type	T Package
Connector Type	SMA(F)

### Environmental

Operating Temperature	-30 to 85 °C
Storage Temperature	-65 to 95 °C

### Notes

TTL Control



Microwave RF Components | Hudson, NH | (603) 546-4100 | [rf.mrcy.com](http://rf.mrcy.com)  
 Specifications subject to change without notice

